

BIS Heavy Duty Clamp HD1501 (BUP1000)

(A 10 06)

for metal pipes 217 - 509 mm

M16



Features and benefits


- two-part clamp with two locking bolts
- heavy design
- bolts secured with anti-loss washer
- with CO₂ welded connection nut
- material: steel
- surface protection:
 - product is part of the BIS UltraProtect® 1000 system
 - suitable for in- and outdoor applications
- surface protection:
 - stands min. 1,000 hours salt spray test (max. 5% red rust) according to ISO 9227
 - noise insulating lining, EPDM rubber, black
 - also available: noise insulating lining of silicone rubber (reddish brown), heat resistant up to +200 °C (A 35 15)
 - age resistant lining
 - sound insulating lining according DIN 4109
 - tested for fire safety



Part No.	D (mm)	D (°)	DN	G	B (mm)	H (mm)	h (mm)	b x s (mm)	cs	F _{a,z} (N)	RAL	Pack 1
33168227	217 - 227	8	200	M16	322	278	150	38 x 4.0	M12	3,800	RAL ²	2
33168250	240 - 250	-	-	M16	345	302	163	38 x 4.0	M12	3,800	RAL ¹	2
33168275	265 - 275	10	250	M16	367	327	175	48 x 5.0	M12	9,200	RAL ¹	2
33168325	315 - 325	12	300	M16	414	374	198	48 x 5.0	M12	9,200	RAL ¹	2
33168364	354 - 364	14	350	M16	453	412	217	48 x 5.0	M12	9,200	RAL ¹	2
33168408	398 - 408	16	400	M16	497	456	239	48 x 5.0	M12	9,200	RAL ¹	2
33168458	448 - 458	18	450	M16	548	506	264	48 x 5.0	M12	9,200	RAL ¹	2
33168509	499 - 509	20	500	M16	599	557	289	48 x 5.0	M12	9,200	RAL ¹	2

RAL¹ = tested, certified and monitored by a third party according to RAL-GZ 655/B.

RAL² = tested, certified and monitored by a third party according to RAL-GZ 655/B and RAL-GZ 656.
For detailed technical information about our RAL marked products, please see the RAL datasheet in our web catalogue.

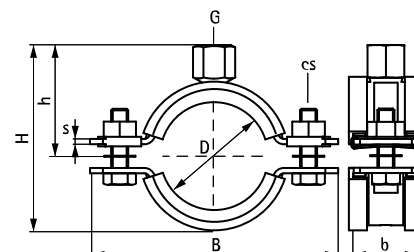

Complementary

BIS RapidStrut® Fixing System
BIS Fixing Accessories
BIS Fastenings

Complementary

BIS Silicone Profile